




HEAVY DUTY FLEXIBLE DUCT

Size: 10" | 12" | 16" | 20" | 24"

Length: 5 Mtr.

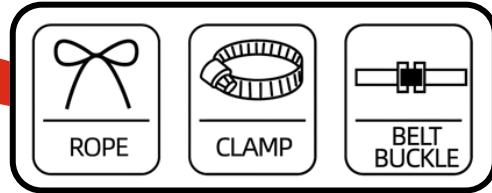

Description:

Our flexible duct is constructed from flame-resistant, static-free PVC fabric reinforced with a steel wire helix. It is designed to withstand exposure to acids, alkalis, oleic acid, and more—ensuring durability in demanding environments. Lightweight and easy to bend, connect, and transport.

Features:

- Material: PVC with steel wire reinforcement
- Resistance: Endures acid, alkali, oleic acid, and more
- Temperature Range: -20°C to +85°C
- Diameter Options: 10" to 24"
- Standard Lengths: 5 meters
- Connection: Comes with strap or PP rope for easy connection with portable ventilators

Applications:

- Tunnels, basements, and shipbuilding sites
- Welding stations and laboratories
- Air-conditioner and engine rooms
- Fire-fighting, municipal engineering, and construction
- Any space requiring dust or fume extraction and fresh air supply
- Stay safe and efficient during operations with this reliable and easy-to-use ducting solution.

Technical Specification:

Data Specification					
Size	10"	12"	16"	20"	24"
Part Number	ATK-DY105M	ATK-DY125M	ATK-DY165M	ATK-DY205M	ATK-DY245M
Colour	Yellow				
Length	5 Mtr.				
Packing Dimension (Centimeter)	30x30x16	34x34x16	45x16x45	55x16x55	65x16x65
Net Weight (KG)	3.1 Kg	3.9 Kg	4.6 Kg	6.9 Kg	7.9 Kg
Gross Weight (KG)	3.5 Kg	4.5 Kg	5.5 Kg	7.6 Kg	8.8 Kg